

CAISSON ETANCHE VERSO



VERSO COMPACT + WBJ



VERSO COMPACT + WBOV

- Indoor/outdoor
- Entirely made of technopolymer
- Side opening, easy camera service
- Weatherproof standard IP66 (with cable glands).
- Different mounting options: standard bracket or cable management bracket or P&T


Innovative and stylish housing, designed to simplify installation and servicing, VERSO Compact ensures total protection against all environmental conditions for standard cameras and small compact zoom lenses. Thanks to its side opening, the accessibility to the camera, lens and all its connections is made far easier. Entirely made with newest, most solid, technopolymer, VERSO Compact guarantees elevated impact resistance, high weather protection to external agents and UV rays. Its weatherproof features are ensured by EPDM-rubber gaskets and 2 cable glands with their specific gaskets.

VERSO Compact offers the possibility of various mountings, either wall or top mount, standard or cable management bracket, and on a P&T head. A wide range of accessories is available, including sunshield, heater kit, camera power supply and heater-fan assistant. These accessories are supplied as a simple plug-in kit, for an easy installation.

	MODELS			
	Sunshield	Heater 110VAC-230VAC	Heater 12VDC-24VAC	Heater fan-assisted 24VAC
HPV36D0A000				
HPV36K0A000	•			
HPV36K1A000	•	•		
HPV36K2A000	•		•	
HPV36K2A015	•			•

VERSO COMPACT

COMPACT MODEL

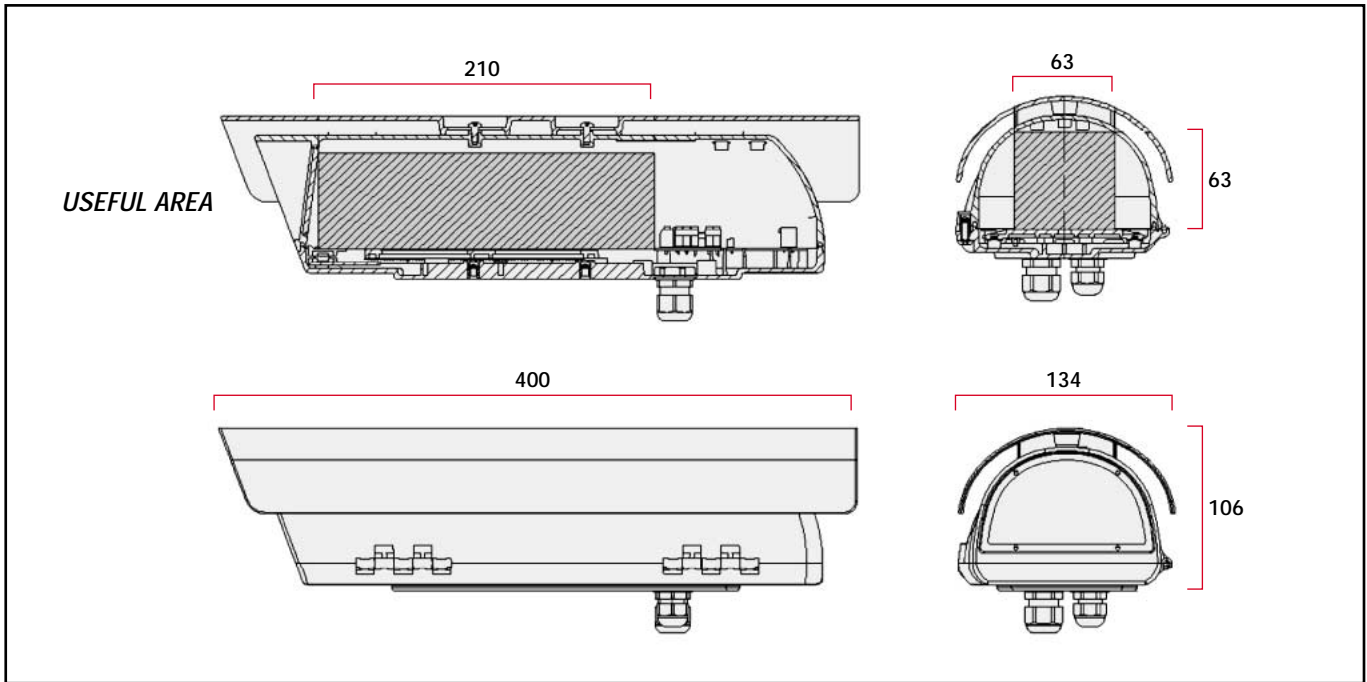

TECHNICAL DATA

GENERAL:

- Entirely made of technopolymer (polycarbonate)
- RAL 9002 Colour
- Supplied with: instruction manual, accessories for camera/lens installation

MECHANICAL:

- 2 removable cable glands: 1 x P9 and 1 x PG11
- Internal useful dimensions (BxH): 63x63 mm (2.5x2.5 in)
- Useful Length: 210 mm (8.3 in)
Housing with accessories (camera power supply, heater kit, etc.)
- Polycarbonate window (BxH): 98x55 mm (3.9x2.2 in)

ELECTRIC:

Heater (ton 15°C+/-3°C toff 22°C +/-3°C) (59°F+/-37°F toff 71°F +/-37°F)

- OHPVH2 12VDC-24VAC absorption 20W
- OHPVH1 110VAC-230VAC absorption 40W

Camera power supply

- OHPVPS1 wide range input 100-240VAC output 12VDC, 1A max
- OHPVPS2 input 230VAC output 24VAC, 400mA max

ENVIRONMENTAL:

- Indoor-Outdoor
 - Operating temperature.
- VERSO Compact with heater: -20°C up to + 50°C (-4°+122°F)

CERTIFICATIONS:

- CE according to EN 60950
- IP66 (with cable glands)
- V2 compliance according to UL94
- Impact Resistance IK10 according EN 50102 standard

ACCESSORIES:

- OHPVS36 Sunshield
- OHPVH1 Heater 110/230VAC
- OHPVH2 Heater 12VDC/24VAC
- OHPVPS1 Wide range power supply 100-240VAC/12VDC, 1A
- OHPVPS2 Power supply 230VAC/24VAC, 400mA
- OHPVV1 Heater fan assistant, continuous duty, 12VDC
- OHPVV2 Heater fan assistant, continuous duty, 24VAC
- OHPVV3 Heater fan assistant continuous duty 230VAC, with wide range power supply 100-240VAC/12VDC, 1A

RELATED PRODUCTS:

Mounts:

- WBJ Wall mount with joint for VERSO Compact with cable glands
- WBM Wall mount with joint for VERSO Compact with cable glands
- WFWC Column mount with joint for VERSO Compact with cable glands
- WCM3 Ceiling mount with joint for VERSO Compact with cable glands
- WCM5 Ceiling mount with joint for VERSO Compact with cable glands (J shape)
- WBOV Wall feed-through bracket
- WBOV3 WBOV mount, counterplate and junction-box with cable management bracket
- WCM4 Ceiling feed-through bracket (J shape)

P&T

- PTH300 series Pan&Tilt, 50/60 Hz for VERSO Compact with cable glands



Unit Weight:
HPV36K1: 1,1 Kg (2.4 lbs)

Package Weight:
HPV36K1: 1,4 Kg (3 lbs)

Package Dimensions:
16x15x43 cm (6.2x5.9x16.9 in)

Master Carton:
10 pcs