

AV Wireless Transmitter Module Series

TM-120200mini / TM-240200mini A/V Transmitter Module

Feature


- 1.2 & 2.4GHz Band frequency transmission option
- Highly integrated circuit / High power output (0.1Watt)
- **Dual Voltage Input---**5V directly & 12V through the standard attached switching cable(built-in regulator)
- Using digital phase-Lock-Loop circuit without drifting problem under high temp. Occasion
- Bendable un-detached antenna designed for better concealed installed or application



Specification

Item Number	TM-120200mini	TM-240200mini
Frequency Band	1200MHz	2400MHz
Available Channel	3 Ch	4 Ch
Audio Sub-Carrier	5.5 Mhz	6.5MHz
Trans. Range	100~200 Meter	
Consumption Current	180 mA	280 mA
Output Power	100 mW	
Operation Voltage	5~5.5 V	
Power Supply	5V or 12V	
Antenna Connector	Un-detached Type	
Weight (TX)	10 g	
Dimension (TX)	21x 24x 7 mm	
Matched Receiver	RX-1260 & RX-1280B	RX-2460 & RX-2480B

Mechanical Sketch

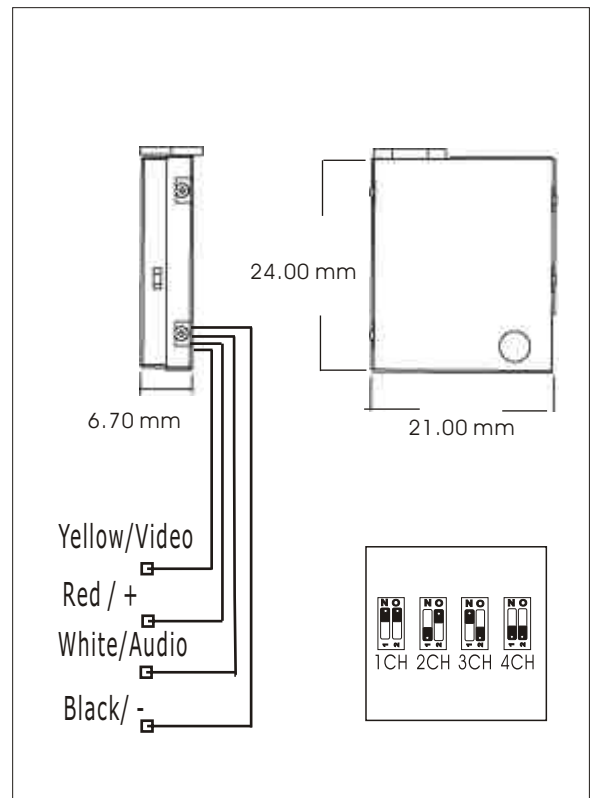

*Specification & appearance may be subjected to change without notice

Standard Shipping Package

- AV Transmitter Module *1
- Standard Dipole Antenna *1
- **AV & power Switching Cable(Built-In a 12 to 5V regulator) *1**

LawMate

E-Mail: info@optovision.fr
URL://www.optovision.fr

Imported in France by Opto Vision S.A.
TEL: 05 61 76 51 11 FAX: 05 61 76 51 52