TB-2451DUO

World's Smallest Portable 1W Transmitter

0.5W & 1W Dual Output

Feature

- 1W and 0.5W instant switch:
  (1) 1.0W to transmit images in long range
  (2) 0.5W to yield great power saving
- Back slide-in battery; 2200mA
- Battery status LED
- 8 different transmitting channels
- Built-in high speed miniature heatsink fan
- Optional control box to interchange
  (1) ON/OFF (2) 1.0W/0.5W (3) Channels
- Featured with vibration alert function

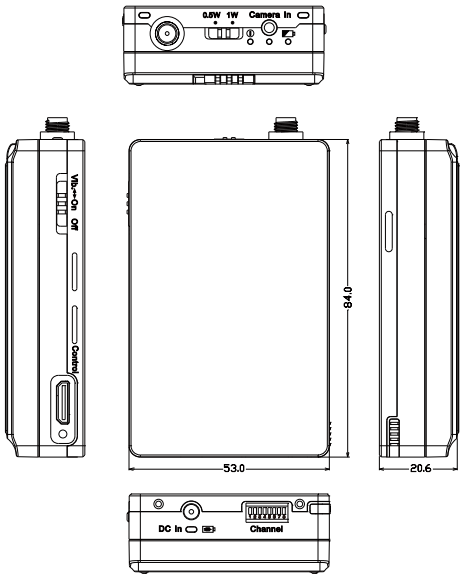

Specification

Item Number	TB-2451DUO
Frequency Band	2.4GHz
Frequency	2370,2390,2410,2430,2450,2470,2490,2510MHz
Output Power	0.5W & 1W Switchable
Battery	Standard: 2200mA, Option:4400mA@3.7V
Power Adaptor	2A / DC 5V
Operating Temperature	0~50°C
Audio Subcarrier	6.5MHz
Operating Voltage	3.4~5.5V
Operating Current	600mA@0.5W; 1200mA@1W
Output Power to Camera	200mA@5V
Antenna	3dbi SMA Dipole Detacheable
Heatsink Fan	Yes
Vibration Alert	Yes
Battery Status LED	Yes
Weight	108g (with Battery)
Dimension	84x53x20.6mm (without SMA)

*Specification & appearance may be subjected to change without notice

Standard Accessories

CHG-0520



DC Charger x 1

PT-PV800

Pouch x 1

TA-2403

2.4GHz 3dbi Ant. x 1

BA-2200

2200mA Li-ion Battery x 1

Optional Accessories

BCM-DU01

Dual Batt. Charging Dock

BA-4400

4400mA Li-ion Battery