




Moniteur Vidéo LCD 15" Haute Luminosité

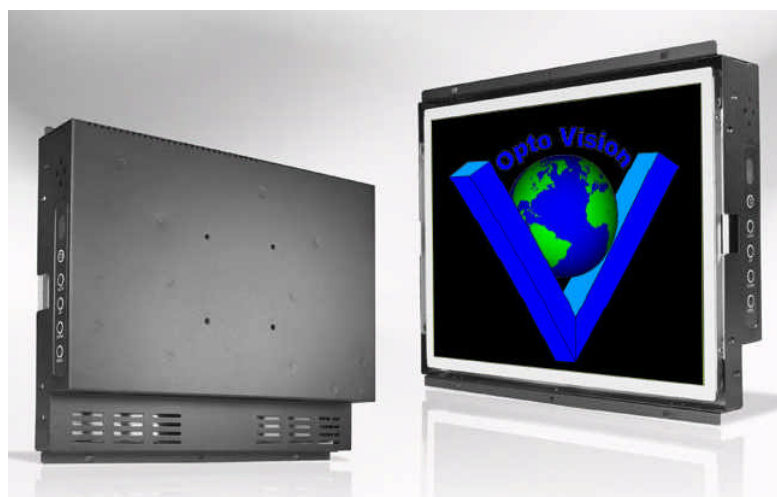

Modèle **OF1505D-HB-1200**

- Très haute luminosité 1200 cd/m²
- Utilisable en plein soleil
- Présentation en châssis
- Backlight réglable
- Menus OSD

Panel	Cell Type	Color active matrix TFT (Thin-Film-Transistor) LCD	
	Aspect Ratio / Size	4 : 3 / 15" viewable diagonal area	
	Glass Surface	Black Anti-Glare, low reflection coating	
	Pixel numbers / Colors	1024(H) x 768(V) / 16.2 Million	
	Pixel Pitch	0.297(H) x 0.297(V) mm	
	Active Area	304.128(H) x 228.096(V) mm	
	Light Source	Long life, 50,000 hrs (typ)	
	Brignthess / Contrast	1200 cd/m ² (typ) , 500 : 1	
	Viewing Angle	Horizontal 160° (typ) (- 80° ~ + 80°)	
		Vertical 150° (typ) (-75° ~ + 75°)	
	Response Time	<12 ms	
Input Sources	PC System	Signal	Analog RGB 0.7/1.0 V _{p-p} , 75 ohms
		Sync	Composite Sync, Separate Sync, G
		Frequency	F _h : 30 - 82Khz , F _v : 50 -75Hz
		Resolution	1024 x 768@60/70/75 Hz
			800 x 600@60/70/75 Hz
			640 x 480@60 / 70 / 75 Hz
			720 x 400@60 / 70 Hz
	Audio System	Stereo Amplifier 2W x 2	
Input Terminals	PC Signal	15 Pin Female D-Sub x 1	
	PC Audio	Stereo Headphone Jack x 1	
	Power Plug	AC Socket (Built-in Power)	
Control	Front Panel (5 Keys)	Men/Select , Auto , Up , Down , Power	
Convenient Features	Auto Calibration	OSD Menu	Back Light Adjustment
	Wall Mount Ready	VESA 75 x 75(mm)	
Power	Input Voltage	Universal / Auto-Sensing, 90 to 260VAC, 50 / 60 Hz	
power Rating Operating Condition	Operation / stand by	25 watt	< 5 watt
	Temperature	0°C ~ 40°C	
	Humidity	10% ~ 90% (no condensation)	
Storage Condition	Temperature	- 20°C ~ 60°C	
	Humidity	10% ~ 90% (no condensation)	
Dimensions	345.3 x 282.0 x 58.0	345.3 x 270.0 x 58.0 without flange	
Weight	N.W. / G.W.	3.5 Kgs / 4.5 Kgs	
Optional	Touch Screen	Protect Glass	Speaker