



WiFi and POE Spy Network camera

VIEW YOUR WORLD FROM ANYWHERE...ANYTIME

ONVIF

WPS

P2P
Network

POE



AnyScene



Available on the
App Store



Available on the
Google Play Store

NC128PW



H.264 ROHS



Connect Wirelessly



Micro SD Slot



PC/Mac



Mobile Enabled



Motion Detection



Secure Connection




Email Alerts



Night Vision

CE FC

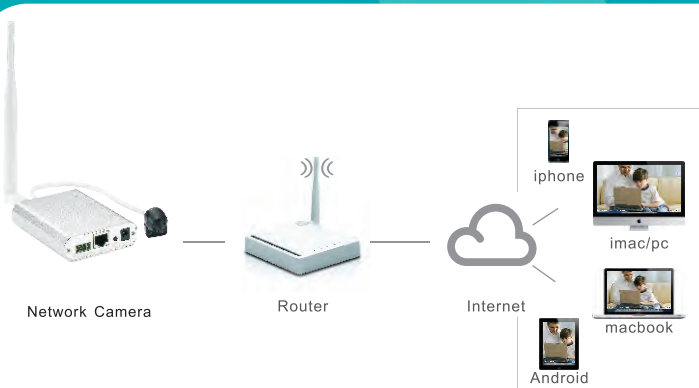

FEATURE:

- WPS
- P2P
- Perfect for iPhone, iPad, Android, PC and Mac
- 802.11b/g/n wireless LAN and Power over Ethernet(POE)-802.3af
- True plug and play, zero setting
- Cloud Computing Technology
- High-Speed H.264, MPEG-4, M-JPEG
- Multi-screen Monitoring :1~ 36
- 720P: 1280X720, NTSC 30fps, PAL 30fps

Specification

NC128PW



| Camera | |
|-------------------------------------|---|
| Image device | 1/4" CMOS |
| Pixels | 921,600 |
| White Balance | Auto |
| Exposure mode | Auto |
| Gain | Auto |
| Viewing angle | Horizontal:55°, Vertical:31° |
| Focal length | F=3.7mm |
| Aperture | F2.0 |
| Min.illumination | 1.0 Lux(0 Lux in night vision mode) |
| Infrared LED | NO |
| Night Vision Distance | NO |
| IR cut filter | NO |
| Distance between Lens and main body | 10m |
| Digital I/O | YES |
| SD card support | 16Mb-128Gb |
| Network | |
| P2P | YES |
| WPS | YES |
| Image compression | H.264,MPEG-4,MJPEG |
| Image resolution | 1280x720(720P),640x480(VGA), 320x240(QVGA), 160x120(QQVGA) |
| Max. frame rate | 30fps @1280x720 |
| Audio compression | AAC |
| External microphone | allow audio input but need sound pick-up |
| Simultaneous viewers | 16 |
| Authentication | ID/Password, Administrator/General User (Up to 64) |
| Network protocols | TCP,UDP,IP,ARP,ICMP,DHCP,DNS,HTTP,FTP,SMTP,NTP,UPnP,DDNS |
| Stream type | HTTP, RTSP/RTP/RTCP, 3GPP |
| Network connection | Ethernet (10BASE-T/100BASE-TX) |
| Power over Ethernet(POE)-802.3af | |
| Wireless LAN | |
| Wireless technology | IEEE802.11b/g/n |
| Frequency | 2.412-2.462GHz |
| Transmission speed | 150Mbps/54Mbps/11Mbps/5.5Mbps/2Mbps/1Mbps(Auto Switch) |
| Security | WEP (64/128 bit),WPA-PSK(AES/TKIP),WPA2-PSK(AES/TKIP) |
| General | |
| Power requirements | DC 12V |
| Power consumption | 3.75W |
| Operating temperature | -5 to +45 °C (+22 to +113 °F) |
| Storage temperature | -20 to +60 °C (-4 to +140 °F) |
| Operating humidity | 20 ~ 80%RH(Non-condensing) |
| Storage humidity | 20 ~ 95%RH(Non-condensing) |
| Lens Dimensions | Φ30x31mm |
| Main body Dimensions(W x D x H mm) | 96.5X73.8X24mm |
| Weight(Main Body and lens) | 390g |
| PC system requirements | |
| Operating system | Windows 2000,XP,VISTA,Windows 7,MAC OS,Linux、 Android,iphone OS |
| Processor | Intel Pentium III, 1GHz or Higher |
| Memory | 256MB RAM Minimum |
| Web browser | Microsoft Internet Explorer Version 5.5 or Later Safari,Mozilla Firefox,Google Chrome and most other browsers |