



Injecteur POE 48V / 24W

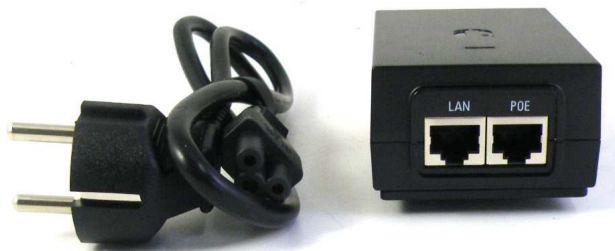

POE-48

Permet l'alimentation électrique de tout appareil IP et notamment les caméras IP acceptant le PoE (*Power over Ethernet*) par le câble réseau data.

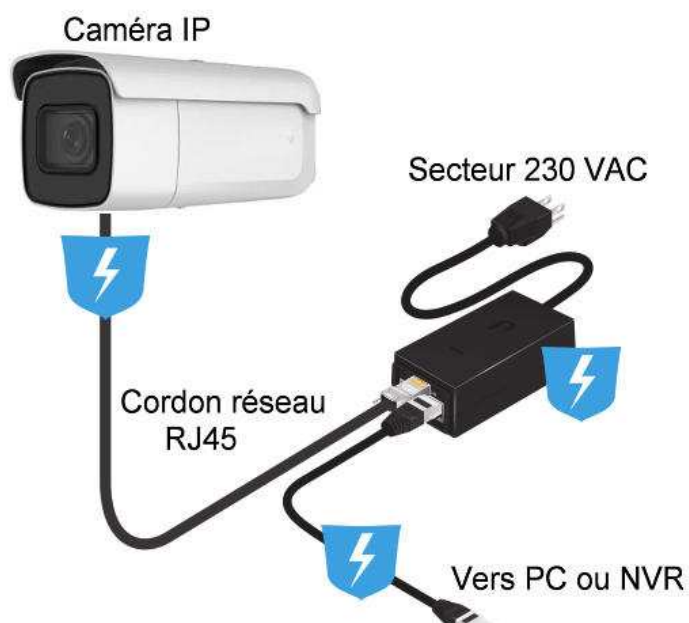

Nota : Pour les caméras consommant plus de 24W choisir l'injecteur POE 60W **PFT1200**



Model	POE-48
Dimensions	88 x 57 x 33 mm (3.47 x 2.24 x 1.30")
Weight	135.5 g (4.78 oz)
Output Voltage	48VDC @ 0.5A
LAN Activity Indicator	No
Gigabit LAN Port	No
Remote Reset Capability	No
Reset Button	No
Rated Voltage	100-240VAC @ 50/60Hz
Input Current	0.6A @ 120VAC, 0.4A @ 240VAC
Inrush Current	<60A Peak @ 120VAC, <120A Peak @ 230VAC
Efficiency	80+%
Output Ripple	1% Max.
Switching Frequency	65 kHz
Line Regulation	≤ 3%
Load Regulation	≤ 5%
2-Pair Powering	Pins 4, 5 (+) and Pins 7, 8 (-)
4-Pair Powering	-
Operating Temperature	0 to 40°C (32 to 104°F)
Storage Temperature	-30 to 70°C (-22 to 158°F)
Operating Humidity	35 to 95% Noncondensing
AC Connector	IEC-320 C6
Data IN / POE	RJ45 Shielded Socket
Surge Protection	Difference and Common Mode
Clamping Protection	11V Data, 60V Power
Max. Surge Discharge	1500A (8/20 μs) Power
Peak Pulse Current	36A (10/1000 μs) Data
Shunt Capacitance	<5 pF data
Response Time	<1 ns
Certifications	CE, FCC, IC, UL