


Caméra Discrète pour Plafond **FLAT 15**



- Boîtier original ultra plat
- S'encastre comme un spot
- Platine d'orientation interne
- Très haute résolution 520LTV
- Grande sensibilité 0,05 lux
- Fonction miroir horiz. & vert.

Cette nouvelle caméra originale permet la surveillance discrète de toute une pièce. Elle s'installe aussi facilement qu'un spot lumineux et ne dépasse pratiquement pas de la surface du plafond (*épaisseur seulement 5,5mm*). La plaque apparente peut se peindre de la couleur du plafond. En option la FLAT 15 peut être livrée avec un hublot antivandale.

Une platine interne support de caméra permet son orientation sur les deux axes de 50° x 45°. L'objectif standard de 4 mm de focale donne un champ de vision de 65° x 50°, soit une surface au sol d'environ 2 m x 3 m.

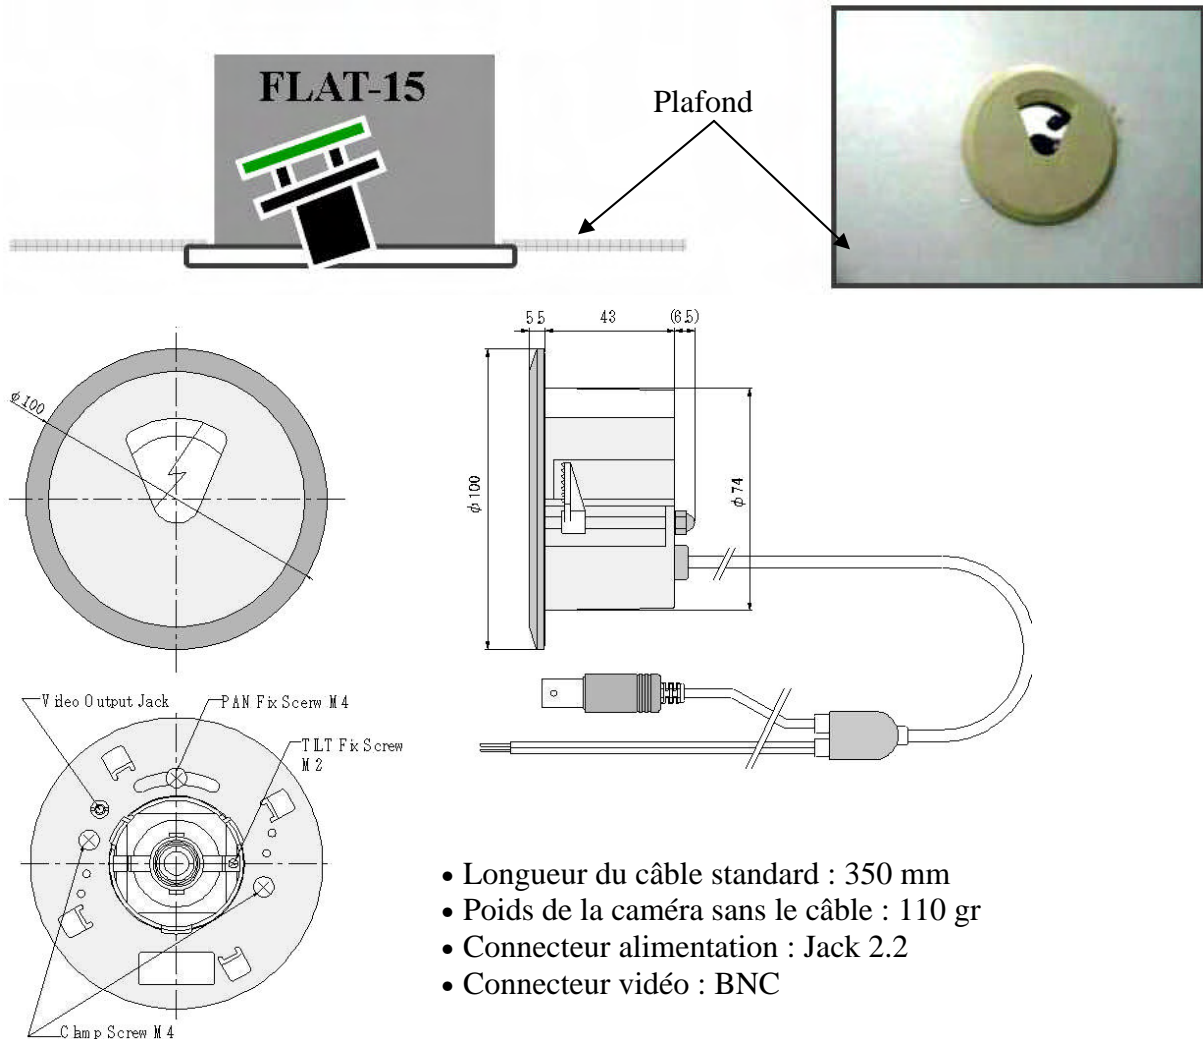

- Longueur du câble standard : 350 mm
- Poids de la caméra sans le câble : 110 gr
- Connecteur alimentation : Jack 2.2
- Connecteur vidéo : BNC

【 SPECIFICATIONS 】

Model	FLAT - 15
TV System	PAL
Image Pickup Device 1/3inch IL CCD Sensor	ICX409AK (SONY)
Effective Pixels	752(H) x 582(V) (SONY)
Scanning System	2:1 Interlace
Synchronizing System	Internal
Horizontal Frequency	15.6250KHz
Vertical Frequency	50.00Hz
Horizontal Resolution	520 TV Lines
Video Signal Output	VBS, YC Output :1.0Vp-p/75 (Video 0.714Vp-p Sync 0.286Vp-p)
Burst Signal Output	0.286Vp-p
S/N Ratio	More than 50dB ($\gamma=1$, AGC OFF, APC OFF, Luminance signal)
Min. Illumination	0.05 lux (Video Output 50%, AGC ON, F1.2) at Frame Integration 8 times
GAMMMA	0.45(or 1.0 remote setting)
AGC	ON(+18 dB Max) / OFF
ALC	Electrical IRIS / Lens IRIS (DC control)
AES	AUTO(1/50 to 1/120,000 sec. for AE) /OFF(1/50sec. for ALC)
BLC	OFF/ON: Calculated besides High-light level area
Mirror	OFF/ON: Horizontal and Vertical (Flip function)
Sense up	ON(Frame Integration mode) /OFF
White Balance	ATW / AWB (one push)
Connect I/F	Serial I/F
Power Supply Voltage	DV12V \pm 10%
Power Supply Current	Max 100mA (at DV+12V, ELC)
Operating temperature humidity	-5 to +45 Max. 80%(No condensation)
Dimensions	32(W) x 32(L) without lens
Weight	Approx. 8g without lens