



## NVR4208-4K

Enregistreur Réseau 8 voies résolution maxi 4K

8CH 1U 4K H.265 Network Video  
Recorder  
NVR4208-4K

**4K** *a4dable + kOmprehensive*

Ultra Display Performance & Decoding Ability



### Features

- > Jusqu'à 8 canaux simultanés en 4K
- > Nouveaux codecs H.265/H.264/MJPEG
- > Bande passante 256Mbps
- > 8 voies@1080P (4 voies@H.265+4 voies@H.264) en temps réel
- > Visualisation et lecture jusqu'à 12 Megapixels en HDMI ou VGA
- > Sorties écrans HDM et VGA simultanées sur mosaïques d'images ou plein écran
- > Relecture simultanée et synchrone de 8 caméras IP
- > Gestion multimarques: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek and etc.
- > ONVIF Version 2.4
- > **Gestion des fonctions intelligentes 3D des Speed Dômes PTZ Dahua**
- > Stockage interne jusqu'à 12 TB sur 2 disques SATA
- > Sauvegardes rapides en AVI par port USB3.0
- > IPC UPnP
- > Connexion classique ou P2P (scan de QR code)
- > Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS) & Smart Phone(DMSS)

# NVR4208-4K


## Technical Specifications

<b>Model</b>	<b>NVR4208-4K</b>
<b>System</b>	
Main Processor	Dual-core embedded processor
Operating System	Embedded LINUX
<b>Video&amp; Audio</b>	
IP Camera Input	8 channel
Two-way Talk	1channel Input, 1channel Output, RCA
<b>Display</b>	
Interface	1 HDMI , 1 VGA
Resolution	3840×2160, 1920×1080, 1280×1024, 1280×720, 1024×768
Display Split	1/4/8/9
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
<b>Recording</b>	
Compression	H.265/H.264/MJPEG
Resolution	12Mp, 8Mp, 6Mp, 5Mp, 3Mp, 1080P, 1.3Mp, 720P & etc.
Record Rate	192Mbps
Bit Rate	1~ 20Mbps
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec
<b>Video Detection &amp; Alarm</b>	
Trigger Events	Recording, PTZ, Tour, Alarm out, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank
Alarm Input	8 channel
Relay Output	3 channel
<b>Playback &amp; Backup</b>	
Sync Playback	1/4/9
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device/Network/Internal SATA burner
<b>Network</b>	
Ethernet	1 RJ-45 port (10/100/1000Mbps)
PoE	N/A
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS and etc.)
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android, Windows Phone
<b>Storage</b>	
Internal HDD	2 SATA III ports, up to 12TB

# NVR4208-4K

Auxiliary Interface	
USB	2 ports (1 Rear USB3.0, 1 Front USB2.0)
RS232	1 port, For PC communication& Keyboard
RS485	1 port, For PTZ control
General	
Power Supply	Single, DC12V/4A
Power Consumption	NVR: 8.7W (without HDD)
Working Environment	-10°C~+55°C/10%~90%RH/86~106kpa
Dimension (W×D×H)	1U, 375mm×275mm×56mm
Weight	1.65KG (without HDD)

## System Connection

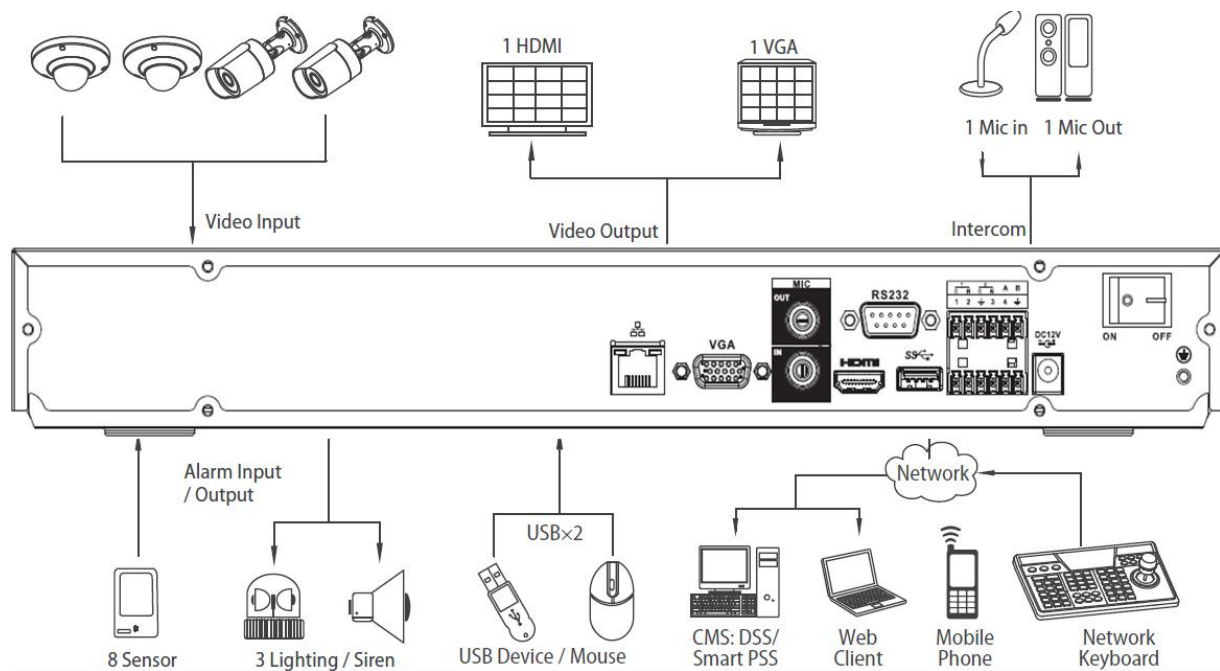

\*Take NVR4208-4K as an example